

CIR-BA48GTC


2 MP AHD Camera



FEATURES

- 1/2.8" 2.1 Mega-pixel Sony CMOS
- support four video signal output(AHD/TVI/CVI/CVBS), default video output is AHD
- Support Dip switch for signal changes
- 12PCs IR LEDs, IR Range: 10M(Outdoor)
- 3.6mm IR Lens
- Feature: Defog, DWDR, 3DNR, DSS, UTC

DIMENSION

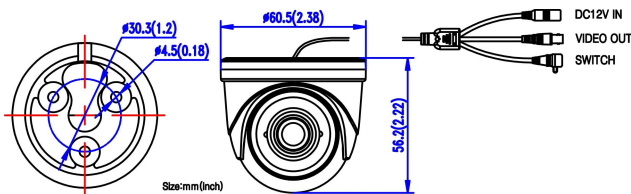

SPECIFICATIONS

| CIR-BA48GTC | |
|------------------------|--|
| IP Rating | IP66 |
| Filter | Removable IR Cut Filter |
| Image Sensor | 1/2.8" 2.1Mega-pixel Sony CMOS |
| Pixels | 1920(H)*1080(V) |
| Horizontal Resolution | 1080P |
| Minimum Lux | 0Lux(12 Pieces IR LED ON) |
| Vertical Frequency | NTSC:60Hz PAL:50Hz |
| Scanning System | Progressive |
| S/N Ratio | ≥54dB |
| Electronic Shutter | NTSC:1/60-1/100,000S PAL:1/50-1/100,000S |
| Lens | 3.6mm IR Lens |
| White Balance | ATW |
| OSD | YES |
| BackLight Compensation | OFF |
| AUTO Gain Control | ON |
| Defog | OFF/ON |
| DNR | OFF/ON |
| DWDR | OFF/ON |
| Day&Night | AUTO/Color/BW/Ext |
| Available IR Distance | 10M |
| Gamma | 0.45 |
| Video Output | HD-AHD (TVI / CVI / CVBS) |
| Power Supply | DC12V ±10% |
| Current consumption | DC12V:350mA(MAX) |
| Dimension | Φ60.5×56.2mm |
| Weight | 200g |
| Storage Temperature | -30 ~ +60°C |
| Operating Temperature | -30 ~ +40°C |