

# CIR-EBA37KLC


## 2 MP AHD Camera



### FEATURES

- 1/3" 2M Progressive Scan CMOS
- Support four video signal output(AHD/TVI/CVI/CVBS), default video output is AHD
- Support Dip switch for signal changes
- 24PCs SMD IR LEDs,IR Range: 20M (Outdoor)
- 3.6mm IR Lens
- Feature:DWDR, 3DNR/2DNR, UTC, MIRROR, BLC, AWB

### DIMENSION

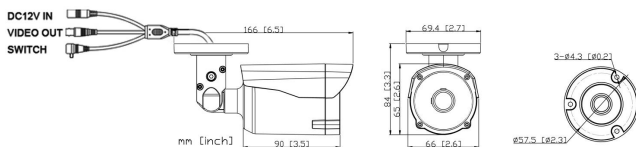

### SPECIFICATIONS

| CIR-EBA37KLC          |   |
|-----------------------|---|
| IP Rating             | IP66                                    |
| Filter                | Removable IR Cut Filter                 |
| Image Sensor          | 1/3" 2M Progressive Scan CMOS           |
| Pixels                | 1920(H)×1080(V)                         |
| Horizontal Resolution | 2MP                                     |
| Minimum Lux           | 0Lux(24PCs SMD LEDs ON)                 |
| Vertical Frequency    | NTSC:60Hz PAL:50Hz                      |
| Scanning System       | Progressive                             |
| S/N Ratio             | ≥52dB                                   |
| Lens                  | 3.6mm IR Lens                           |
| White Balance         | ATW/MWB                                 |
| FLIP                  | OFF/ON                                  |
| MIRROR                | OFF/ON                                  |
| OSD                   | NO                                      |
| 3DNR /2DNR            | AUTO/MANUAL                             |
| DWDR                  | OFF/ON                                  |
| Day&Night             | AUTO/Color/BW/Ext                       |
| Available IR Distance | 20M                                     |
| Video Output          | HD-AHD ( TVI / CVI / CVBS )             |
| Power Supply          | DC12V±10%                               |
| Current consumption   | 530mA (MAX)                             |
| Dimension             | 166.5×83.8×69.4mm                       |
| Weight                | 480g                                    |
| Storage Temperature   | -30 ~ +60℃                              |
| Operating Temperature | IR On: -30 ~ +40℃<br>IR Off: -30 ~ +55℃ |

