

# CIR-EBA37LYC

## 5MP AHD Camera




### SPECIFICATIONS

| CIR-EBA37LYC           |  |
|------------------------|--|
| IP Rating              | IP66                                   |
| Filter                 | Removable IR Cut Filter                |
| Image Sensor           | 1/2.8" 5M Progressive Scan Sony CMOS   |
| Pixels                 | 2688(H)×1944(V)                        |
| Horizontal Resolution  | 5MP                                    |
| Minimum Lux            | 0Lux(24 Pieces SMD IR LED ON)          |
| Vertical Frequency     | NTSC:60Hz PAL:50Hz                     |
| Scanning System        | Progressive                            |
| S/N Ratio              | ≥56dB                                  |
| Lens                   | 3.6mm IR Lens                          |
| Electronic Shutter     | NTSC:1/30-1/30,000S PAL:1/25-1/30,000S |
| White Balance          | AUTO /AUTOext /PRESET /MANUAL          |
| OSD                    | YES                                    |
| BackLight Compensation | ON/OFF                                 |
| AUTO Gain Control      | ON                                     |
| Defog                  | OFF/ON                                 |
| DNR                    | OFF /LOW /MIDDLE /HIGH                 |
| WDR                    | OFF/ON                                 |
| BLC                    | OFF/ON                                 |
| HLC                    | OFF/ON                                 |
| MOTION                 | OFF/ON                                 |
| MIRROR                 | OFF/ON                                 |
| PRIVACY                | 16 region                              |
| Day&Night              | AUTO/Color/BW/Ext                      |
| Available IR Distance  | 20M                                    |
| Gamma                  | 0.45                                   |
| Video Output           | HD-AHD ( TVI/ CVI / CVBS)              |
| Power Supply           | DC12V±10%                              |
| Current consumption    | 530mA (MAX)                            |
| Dimension              | 166.5×83.8×69.4mm                      |
| Weight                 | 480g                                   |
| Storage Temperature    | -30 ~ +60°C                            |
| Operating Temperature  | -30 ~ +40°C                            |

### FEATURES

- 1/2.8" 5M Progressive Scan Sony CMOS
- support four video singnal output(5MP AHD / 5MP TVI / 4MP CVI / 960H CVBS), default video output is AHD
- 24PCs SMD IR LEDs,IR Range: 20M(outdoor)
- 3.6mm IR Lens
- Support Dip switch for signal changes
- Feature:Defog,BLC,HLC,WDR,DNR,SENS-UP,MOTION,MIRROR,PRIVACY,UTC

### DIMENSION

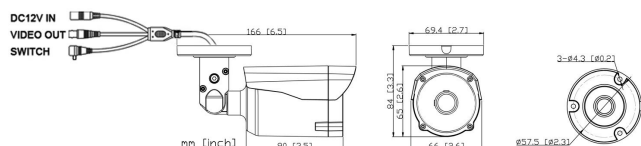

4-6F No.5 Lane 130, Min-Chung Road, Hsin Tien City, Taiwan  
 Room B 3rd Building of Kin On Commercial Building, Nos.51 Jervois Street, Sheung Wan, Hong Kong  
 3rd~5th Floor, 2A Building, Huihao Industrial Park, He Shui Kou, Gongming, Shenzhen, China

[www.irlab.net](http://www.irlab.net)      [info@irlab.net](mailto:info@irlab.net)