


CIR-EDO28LTC



FEATURES

- 1/2.8" 5M Progressive Scan Sony CMOS
- support four video signal output(AHD/TVI/CVI/CVBS/HD-SDI/XE-SDI), default video output is AHD
- 42PCs SMD IR LEDs,IR Range: 35~40M (Outdoor)
- Support Dip switch for signal changes
- Feature:Defog,BLC,HLC,WDR,DNR,SENS-UP,MOTION,MIRROR,PRIVACY,UTC

DIMENSION

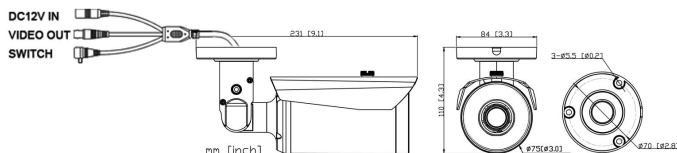

SPECIFICATIONS

CIR- EDO28LTC

IP Rating	IP66
Filter	Removable IR Cut Filter
Image Sensor	1/2.8" 5M Progressive Scan Sony CMOS
Pixels	2688(H)×1944(V)
Horizontal Resolution	5MP
Minimum Lux	0Lux (42PCs SMD LEDs ON)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Scanning System	Progressive
S/N Ratio	≥56dB
Lens	2.7-13.5mm Motorized Varifocal IR Lens
Electronic Shutter	NTSC:1/30-1/30,000S PAL:1/25-1/30,000S
White Balance	AUTO /AUTOext /PRESET /MANUAL
OSD	YES
BackLight Compensation	ON/OFF
AUTO Gain Control	ON
Defog	OFF/ON
DNR	OFF /LOW /MIDDLE /HIGH
WDR	OFF/ON
BLC	OFF/ON
HLC	OFF/ON
MOTION	OFF/ON
MIRROR	OFF/ON
PRIVACY	16 region
Day&Night	AUTO/Color/BW/Ext
Available IR Distance	35~40M (114.8~131.2ft)
Gamma	0.45
Video Output	HD-AHD (TVI / CVI / CVBS/HD-SDI/XE-SDI)
Power Supply	DC12V±10%
Current consumption	600mA (MAX)
Dimension	231×84×110mm
Weight	720g
Storage Temperature	-30 ~ +60°C
Operating Temperature	-30 ~ +40°C