

# CIR-EDO46KJC


## 2 MP AHD Motorized Lens Camera



### FEATURES

- 1/2.8" 2.1 Mega-pixel Sony CMOS
- support four video singnal output(AHD/TVI/CVI/CVBS), default video output is AHD
- Support Dip switch for signal changes
- 24PCs SMD LED,IR Range: 15~20M(outdoor)
- 2.7-13.5mm Motorized Varifocal IR Lens
- Feature:Defog, WDR,3DNR,UTC

### DIMENSION

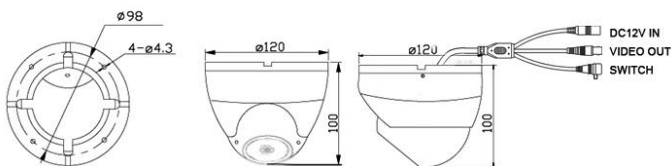

### SPECIFICATIONS

| CIR-EDO46KJC           |   |
|------------------------|---|
| IP Rating              | IP66                                      |
| Filter                 | Removable IR Cut Filter                   |
| Image Sensor           | 1/2.8" 2.1Mega-pixel Sony CMOS            |
| Pixels                 | 1920(H)*1080(V)                           |
| Horizontal Resolution  | 1080P                                     |
| Minimum Lux            | 0Lux(24PCs SMD LEDs ON)                   |
| Vertical Frequency     | NTSC:60Hz PAL:50Hz                        |
| Scanning System        | Progressive                               |
| S/N Ratio              | ≥54dB                                     |
| Lens                   | 2.7-13.5mm Motorized Varifocal IR Lens    |
| White Balance          | ATW                                       |
| OSD                    | YES                                       |
| BackLight Compensation | OFF                                       |
| AUTO Gain Control      | ON  |
| Defog                  | OFF/ON                                    |
| DNR                    | OFF/ON                                    |
| WDR                    | OFF/ON                                    |
| Day&Night              | AUTO/Color/BW/Ext                         |
| Available IR Distance  | 15-20M                                    |
| Gamma                  | 0.45                                      |
| Video Output           | HD-AHD ( TVI / CVI / CVBS)                |
| Power Supply           | DC12V±10%                                 |
| Current consumption    | 530mA (MAX)                               |
| Dimension              | 120×100mm                                 |
| Weight                 | 790g                                      |
| Storage Temperature    | -30 ~ +60°C                               |
| Operating Temperature  | IR On: -30 ~ +40°C<br>IR Off: -30 ~ +50°C |

