




## FEATURES

- Programme: IMX335+RV1109 , FLASH : 256MB , DDR : 1GB , 5MP@25/30fps high resolution, 5M/4M/3M/2M/1080P/720P/D1 real-time video output
- Dual-core ARM Cortex-A7 and RISC-V MCU , 1.2TOPs, NPU2.0
- 6-50mm Varifocal IR Lens, 42Pcs SMD LED, Available IR Distance: 55 ~ 60M
- IP66 compliant
- ONVIF Profile S and API
- Storage: NVR 、 VMS 、 TF Card(Optional)
- Support H.265 and H.264
- Power Supply: DC12V±10% , PoE (Optional)

## DIMENSION

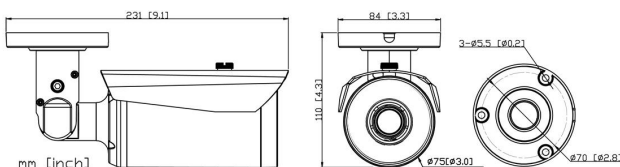

## SPECIFICATIONS

### CIR-ESM28MJC

#### Camera

IP Rating	IP66
Filter	Removable IR Cut Filter
Image Sensor	Progressive Scan CMOS
Lens	6-50mm Varifocal IR Lens
Resolution	2592(H)×1920(V)
Electronic Shutter	NTSC:1/30-1/100,000s PAL:1/25-1/100,000s
Min Illumination	0Lux
Available IR Range	55 ~ 60M

#### Video/Audio

Video Compression	H.264 / H.265
Transmission Stream Rate	Dual Stream ( Code Rate:36Kb~16M )
Frame Rate	1~25fps ( PAL ) , 1~30fps ( NTSC )
Audio Compression	G711A, G711U

#### External Interface

Network Interface	RJ45*1 10M/100M
Remote Control Interface	/
Audio Interface	input/output*1 (Optional)
Alarm Interface	input/output*1 (Optional)

#### Network

Protocol	TCP/IP, UDP, SMTP, DDNS, DHCP, FTP, RTSP, HTTPS, IPv6
Network Support	ONVIF Profile S , API
Maximum Users	10
Web Language	English, Simplified Chinese, Traditional Chinese

#### Function

Image Setting	Contrast, Brightness, Sharpness, Saturation, WDR, 3DNR, HLC, BLC
Storage	NVR, VMS, TF Card(Optional)
Video Type	Manual, Timing, Motion Detection, Alarm Video
Alarm Triggers	Motion Detection, Alarm
Alarm Event	Snapshot, Video, Alarm Output, Email Upload,
System/Explorer Support	Windows XP, Windows 7, IE11.0 and above
General Function	Flashing, Mirror, OSD information overlay, Camera angle

#### General

Power Supply	DC12V±10% , POE(Optional)
Current Consumption	720mA(Max)
Dimension	231×84×110mm
Weight	820g
Storage Temperature	-30 ~ +60°C
Operating Temperature	-30 ~ +40°C