


5 MP Network Cameras



FEATURES

- Programme: GC4653+FH8856 V200 ,FLASH :16MB ,DDR :128MB , 5MP@25/fps、 4MP@25/fps high resolution, 3M/1080P real-time video output
- Dual stream support (Stream rate: 36Kb-16M)
- 6-50mm Varifocal IR Lens, 42Pcs SMD LED, Available IR Distance:55 ~ 60M
- IP66 compliant
- ONVIF Profile S and API
- True Day/ Night Operation: IR Cut Filter (ICR)
- Storage: NVR 、 VMS
- Support H.265 and H.264
- Power Supply: DC12V±10%, PoE (Optional)

DIMENSION

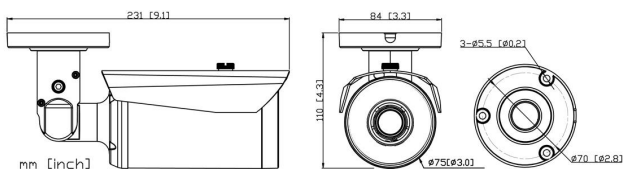

SPECIFICATIONS

CIR-ESM28MNC

Camera

IP Rating	IP66
Filter	Removable IR Cut Filter
Image Sensor	Progressive Scan CMOS
Lens	6-50mm Varifocal IR Lens
Resolution	2592(H)×1920(V)
Electronic Shutter	NTSC:1/30-1/100,000s PAL:1/25-1/100,000s
Min Illumination	0Lux
Available IR Range	55 ~ 60M

Video/Audio

Video Compression	H.264 / H.265
Transmission Stream Rate	Dual Stream (Code Rate:36Kb~16M)
Frame Rate	1~25fps (PAL) ,1~30fps (NTSC)
Audio Compression	/

External Interface

Network Interface	RJ45*1 10M/100M
Remote Control Interface	/
Audio Interface	/
Alarm Interface	/

Network

Protocol	TCP/IP, SMTP, DDNS, DHCP, FTP, NTP, RTSP,HTTPS,IPV6
Network Support	ONVIF Profile S , API
Maximum Users	10
Web Language	English, Simplified Chinese, Traditional Chinese

Function

Image Setting	Contrast, Brightness, Sharpness, Saturation, 3DNR, BLC, DWDR
Storage	NVR、 VMS、
Video Type	Manual, Motion Detection
Alarm Triggers	Motion Detection
Alarm Event	Snapshot, Video, Email Upload,
System/Explorer Support	Windows XP, Windows 7, IE11.0 and above
General Function	Flashing, Mirror, OSD information overlay, Camera angle

General

Power Supply	DC12V±10% , POE(Optional)
Current Consumption	720mA(Max)
Dimension	231×84×110mm
Weight	820g
Storage Temperature	-30 ~ +60°C
Operating Temperature	-30 ~ +40°C