

# CIR-ESR28KLC




## 2 MP AHD Camera



### FEATURES

- 1/3" 2M Progressive Scan CMOS
- Support four video signal output(AHD/TVI/CVI/CVBS), default video output is AHD
- Support Dip switch for signal changes
- 42PCs SMD LEDs, IR Range: 35~40M (Outdoor)
- 2.8-12mm Varifocal IR Lens
- Feature:DWDR, 3DNR/2DNR, UTC, MIRROR, BLC, AWB

### DIMENSION

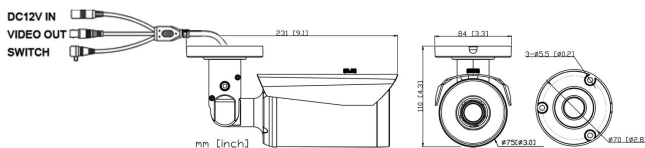

### SPECIFICATIONS

CIR-ESR28KLC	
IP Rating	IP66
Filter	Removable IR Cut Filter
Image Sensor	1/3" 2M Progressive Scan CMOS
Pixels	1920(H)×1080(V)
Horizontal Resolution	2MP
Minimum Lux	0Lux(42PCs SMD LEDs ON)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Scanning System	Progressive
S/N Ratio	≥52dB
Lens	2.8-12mm Varifocal IR Lens
White Balance	ATW/MWB
FLIP	OFF/ON
MIRROR	OFF/ON
OSD	NO
3DNR /2DNR	AUTO/MANUAL
DWDR	OFF/ON
Day&Night	AUTO/Color/BW/Ext
Available IR Distance	35~40M
Video Output	HD-AHD ( TVI / CVI / CVBS )
Power Supply	DC12V±10%
Current consumption	630mA (MAX)
Dimension	231×84×110mm
Weight	720g
Storage Temperature	-30 ~ +60℃
Operating Temperature	IR On: -30 ~ +40℃ IR Off: -30 ~ +55℃

## IRLAB Limited

Floor 4-6, Building 2, Huihao Industrial Park, Jin'an Road, Guangming District, Shenzhen, China

Tel: +86-755-8821 0202

Fax: +86-755-8821 0303

Http://www.irlab.net

