

CIR-ESR28LSC




2 MP AHD Camera



FEATURES

- 1/ 2.8" 2.1Mega-pixel SONY CMOS
- 2.8-12mm Varifocal IR Lens
- 42PCs SMD IR LEDs, IR Range: 35~40M (Outdoor)
- support four video singnal output(AHD/TVI/CVI/CVBS), default video output is AHD
- Support Dip switch for signal changes
- Feature: Defog, WDR, 3DNR, SENS-UP, UTC

DIMENSION

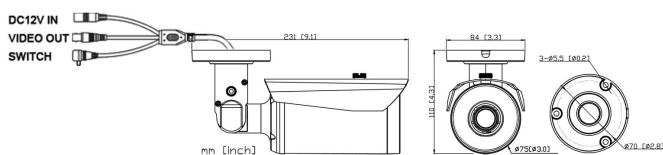

SPECIFICATIONS

CIR-ESR28LSC	
IP Rating	IP66
Filter	Removable IR Cut Filter
Image Sensor	1/ 2.8" 2.1Mega-pixel Sony CMOS
Pixels	1920(H)*1080(V)
Horizontal Resolution	1080P
Minimum Lux	0Lux(42PCs SMD IR LEDs ON)
Vertical Frequency	NTSC:60Hz PAL:50Hz
Scanning System	Progressive
S/N Ratio	≥50dB
Electronic Shutter	NTSC:1/60-1/60,000S PAL:1/50-1/50,000S
Lens	2.8-12mm Varifocal IR Lens
White Balance	ATW
OSD	YES
BackLight Compensation	ON/OFF
AUTO Gain Control	ON
3DNR	ON/OFF
WDR	ON/OFF
Defog	ON/OFF
Day&Night	AUTO/Color/BW/Ext
Available IR Distance	35~40M
Gamma	0.45
Video Output	HD-AHD (TVI / CVI / CVBS)
Power Supply	DC12V±10%
Current consumption	600mA (MAX)
Dimension	231×84×110mm
Weight	720g (25.4oz)
Storage Temperature	-30 ~ +60°C
Operating Temperature	-30 ~ +40°C

4-6F No.5 Lane 130, Min-Chung Road, Hsin Tien City, Taiwan
 Room B 3rd Building of Kin On Commercial Building, Nos.51 Jervois Street, Sheung Wan, Hong Kong
 3rd~5th Floor, 2A Building, Huihao Industrial Park, He Shui Kou, Gongming, Shenzhen, China

www.irlab.net info@irlab.net