

# CIR-HBS6GMJD


## 5 MP Network Cameras



### FEATURES

- Programme: IMX335+RV1109 , FLASH : 256MB , DDR : 1GB , 5MP@25/30fps high resolution, 5M/4M/3M/2M/1080P/720P/D1 real-time video output
- Dual-core ARM Cortex-A7 and RISC-V MCU , 1.2TOPs, NPU2.0
- 2.8mm IR Lens, 3Pcs Super High Power IR LED, Available IR Distance: 15-20M
- IP67 compliant
- Support HDMI1.4 , Video output: 1080P
- Support HDMI display : LOGO、Sign
- ONVIF Profile S and API
- Storage: NVR 、 VMS、 TF Card
- Support H.265 and H.264
- Power Supply: DC12V±10%, PoE

### DIMENSION

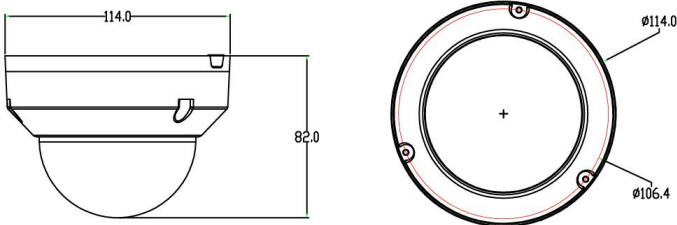

### SPECIFICATIONS

CIR-HBS6GMJD	
<b>Camera</b>	
IP Rating	IP67
Filter	Removable IR Cut Filter
Image Sensor	Progressive Scan CMOS
Lens	2.8mm IR Lens
Resolution	2592(H)×1920(V)
Electronic Shutter	NTSC:1/30-1/100,000s PAL:1/25-1/100,000s
Min Illumination	0Lux
Available IR Range	15-20M
<b>Video/Audio</b>	
Video Compression	H.264 / H.265
Transmission Stream Rate	Dual Stream ( Code Rate:36Kb~16M )
Frame Rate	1~25fps ( PAL ) , 1~30fps ( NTSC )
Audio Compression	G711A、 G711U
<b>External Interface</b>	
HDMI1.4	1080P/30FPS
Network Interface	RJ45*1 10M/100M
Audio Interface	input/output*1
Alarm Interface	input/output*1
<b>Network</b>	
Protocol	IPv4, IPv6, DHCP , HTTP , Onvif , DNS , DDNS , FTP , UPNP , RTSP , SMTP , NTP
Network Support	ONVIF Profile S , API
Maximum Users	10
Web Language	English, Simplified Chinese, Traditional Chinese
<b>Function</b>	
Image Setting	Contrast, Brightness, Sharpness, Saturation, WDR, 3DNR, HLC, BLC
Storage	NVR、 VMS、 TF Card ( MAX 1TB )
Video Type	Manual, Timing, Motion Detection , Alarm Video
Alarm Triggers	Motion Detection, Alarm
Alarm Event	Snapshot, Video, Alarm Output, Email Upload,
System/Explorer Support	Chrome, Firefox, Safari, IE
General Function	Flashing, Mirror, OSD information overlay、 Camera angle
<b>General</b>	
Power Supply	DC12V±10% , POE
Current Consumption	570mA ( MAX )
Dimension	Ø114×82mm
Weight	600g
Storage Temperature	-30 ~ +60°C
Operating Temperature	-30 ~ +40°C