

CIR-HSM29GTC


2 MP AHD Camera



FEATURES

- 1/2.8" 2.1 Mega-pixel Sony CMOS
- support four video singnal output(AHD/TVI/CVI/CVBS), default video output is AHD
- Support Dip switch for signal changes
- 8PCs Super High Power IR LEDs,IR Range: 95~100M (Outdoor)
- 6-50mm Varifocal IR Lens
- Feature:Defog, DWDR, 3DNR, DSS, UTC

DIMENSION

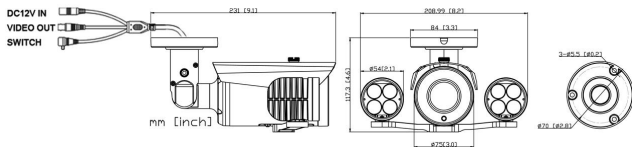

SPECIFICATIONS

| CIR-HSM29GTC | |
|------------------------|--|
| IP Rating | IP66 |
| Filter | Removable IR Cut Filter |
| Image Sensor | 1/2.8" 2.1Mega-pixel Sony CMOS |
| Pixels | 1920(H)*1080(V) |
| Horizontal Resolution | 1080P |
| Minimum Lux | 0Lux(8PCs Super High Power LEDs ON) |
| Vertical Frequency | NTSC:60Hz PAL:50Hz |
| Scanning System | Progressive |
| S/N Ratio | ≥54dB |
| Electronic Shutter | NTSC:1/60-1/100,000S PAL:1/50-1/100,000S |
| Lens | 6-50mm Varifocal IR Lens |
| White Balance | ATW |
| OSD | YES |
| BackLight Compensation | OFF |
| AUTO Gain Control | ON |
| Defog | OFF/ON |
| DNR | OFF/ON |
| DWDR | OFF/ON |
| Day&Night | AUTO/Color/BW/Ext |
| Available IR Distance | 95~100M |
| Gamma | 0.45 |
| Video Output | HD-AHD (TVI / CVI / CVBS) |
| Power Supply | DC12V±10% |
| Current consumption | 1400mA (MAX) |
| Dimension | 231×209×117.3mm |
| Weight | 1100g |
| Storage Temperature | -30 ~ +60°C |
| Operating Temperature | -30 ~ +40°C |