

Public View Monitor



Contents

01⁰¹⁻⁰⁶ ✓



Original Series

01 PVM-S101ATH-P
02 PVM-S101NTH-P
03 PVM-S215ATH-P
04 PVM-S270ATH-P
05 PVM-M270BTH-P
06 PVM-S320ATH

07⁰⁷⁻¹² ✓



Basic Series

07 PVM-S101ATH-LPRW
08 PVM-S101NTH-LPRW
09 PVM-S215ATH-LPRW
10 PVM-S270ATH-LPRW
11 PVM-M270BTH-LPRW
12 PVM-S320ATH-LRW

13¹³⁻¹⁸ ✓




Standard Series

13 PVM-S101ATF-LPRW
14 PVM-S101NTF-LPRW
15 PVM-S215ATF-LPRW
16 PVM-S270ATF-LPRW
17 PVM-M270BTF-LPRW
18 PVM-S320ATF-LRW

10.1" Landscape Original PVM

PVM-S101ATH-P



Original Series

S101A

S101N

S215A

S270A

M270B

S320A

Basic Series

S101A

S101N

S215A

S270A

M270B

S320A

Standard Series

S101A

S101N

S215A

S270A

M270B


S320A

Display	
Screen Size	10.1"
Resolution	1280×800 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	170°/ 170°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	Motion Detection/ Video Blind/ Alarm in
Storage	TF Card / NVR / FTP
Interface	
Alarm Interface	Input/ Output×1
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
Ethernet 10 / 100	RJ45×1
General	
Power Supply	DC12V±10%, POE
Dimension	251.58×198.86×30mm
Weight	Net Weight 1.7Kg, Gross Weight 1.9Kg

FEATURES


- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, indicator lights
- Support batch device setting via CMS
- Powered by Linux OS. More stable and cost effective

DIMENSIONS

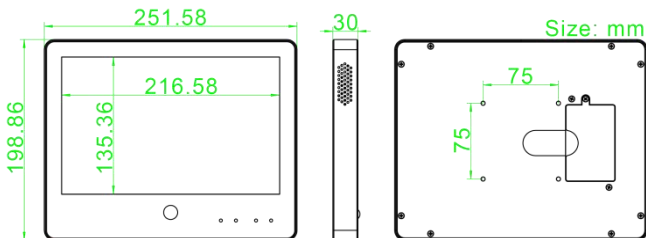

10.1" Portrait Original PVM

PVM-S101NTH-P



Original Series

S101A

S101N

S215A

S270A

M270B

S320A

Basic Series

S101A

S101N

S215A

S270A

M270B

S320A

Standard Series

S101A

S101N

S215A

S270A

M270B


S320A

Display	
Screen Size	10.1"
Resolution	800×1280 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	170°/ 170°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:47±3°,V:80±4°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	Motion Detection/ Video Blind/ Alarm in
Storage	TF Card / NVR / FTP
Interface	
Alarm Interface	Input/ Output×1
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
Ethernet 10 / 100	RJ45×1
General	
Power Supply	DC12V±10%, POE
Dimension	166×286×30mm
Weight	Net Weight 1.63Kg, Gross Weight 1.81Kg

FEATURES


- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, indicator lights
- Support batch device setting via CMS
- Powered by Linux OS. More stable and cost effective

DIMENSIONS



21.5" Landscape Original PVM

PVM-S215ATH-P



Original Series

S101A

S101N

S215A

S270A

M270B

S320A

Basic Series

S101A

S101N

S215A

S270A

M270B

S320A

Standard Series

S101A

S101N

S215A

S270A

M270B


S320A

Display	
Screen Size	21.5"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178° / 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	Motion Detection/ Video Blind/ Alarm in
Storage	TF Card / NVR / FTP
Interface	
Alarm Interface	Input/ Output×1
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
Ethernet 10 / 100	RJ45×1
General	
Power Supply	DC12V±10%, POE
Dimension	519.6×353.2×40mm
Weight	Net Weight 6.02Kg, Gross Weight 6.75Kg

FEATURES


- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, indicator lights
- Support batch device setting via CMS
- Powered by Linux OS. More stable and cost effective

DIMENSIONS

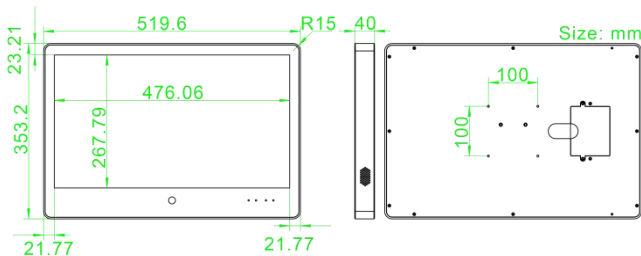

27" Landscape Original PVM

PVM-S270ATH-P

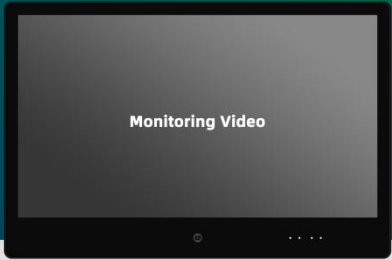

Original Series

S101A

S101N

S215A

S270A

M270B

S320A

Basic Series

S101A

S101N

S215A

S270A

M270B

S320A

Standard Series

S101A

S101N

S215A

S270A

M270B


S320A

Display	
Screen Size	27"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178° / 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	Motion Detection/ Video Blind/ Alarm in
Storage	TF Card / NVR / FTP
Interface	
Alarm Interface	Input/ Output×1
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
Ethernet 10 / 100	RJ45×1
General	
Power Supply	DC12V±10%, POE
Dimension	643×427.15×40mm
Weight	Net Weight 11.3Kg, Gross Weight 12.3Kg

FEATURES

- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, indicator lights
- Support batch device setting via CMS
- Powered by Linux OS. More stable and cost effective


DIMENSIONS

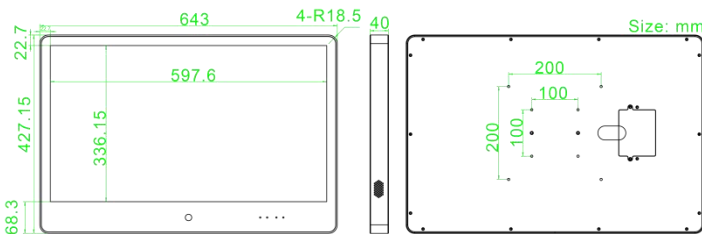

27" Landscape Original PVM

PVM-M270BTH-P

Motorized Varifocal Lens

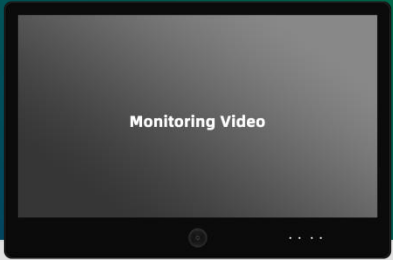


FEATURES

- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, indicator lights
- Zoom and focus can be done from the WEB, and batch setting can be done from CMS
- Support batch device setting via CMS
- Powered by Linux OS. More stable and cost effective


Display	
Screen Size	27"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178°/ 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	2.7-13.5mm Motorized Varifocal Lens (H:(55°-103°)±5°,V:(20°-36°)±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	Motion Detection/ Video Blind/ Alarm in
Storage	TF Card / NVR / FTP
Interface	
Alarm Interface	Input/ Output×1
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
Ethernet 10 / 100	RJ45×1
General	
Power Supply	DC12V±10%, POE
Dimension	643×427.15×65mm
Weight	Net Weight 10.9Kg, Gross Weight 11.9Kg

DIMENSIONS

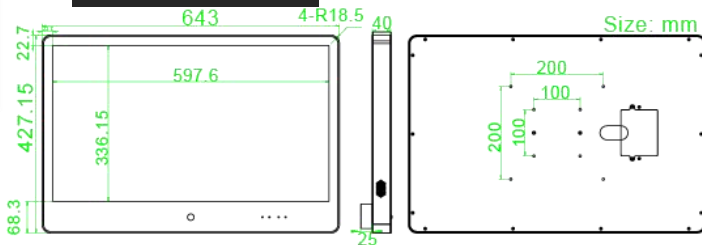

32" Landscape Original PVM

PVM-S320ATH

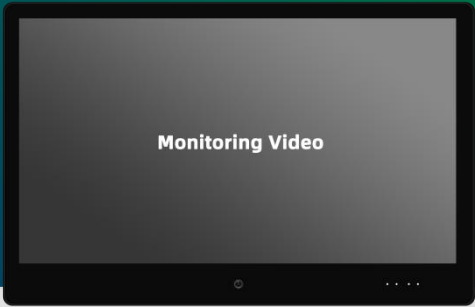

Original Series

S101A

S101N

S215A

S270A

M270B

S320A

Basic Series

S101A

S101N

S215A

S270A

M270B

S320A

Standard Series

S101A

S101N

S215A

S270A

M270B


S320A

Display	
Screen Size	32"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178°/ 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	Motion Detection/ Video Blind/ Alarm in
Storage	TF Card / NVR / FTP
Interface	
Alarm Interface	Input/ Output×1
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
Ethernet 10 / 100	RJ45×1
General	
Power Supply	DC12V±10%
Dimension	761.6×491×35mm
Weight	Net Weight 13.21Kg, Gross Weight 14.82Kg

FEATURES

- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, indicator lights
- Support batch device setting via CMS
- Powered by Linux OS. More stable and cost effective

DIMENSIONS

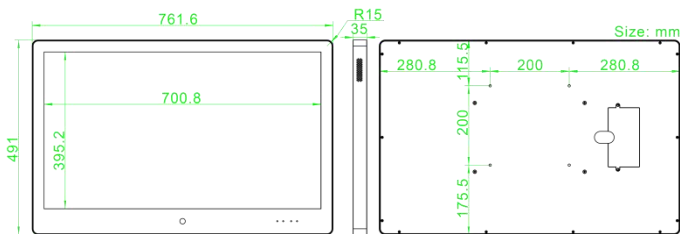

10.1" Landscape Basic PVM

PVM-S101ATH-LPRW



Original Series

S101A

S101N

S215A

S270A

M270A

S320A

Basic Series

S101A

S101N

S215A

S270A

M270B

S320A

Standard Series

S101A

S101N

S215A

S270A

M270B


S320A

Display	
Screen Size	10.1"
Resolution	1280×800 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	170° / 170°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Display Mode	Full screen video: 1280×800 Full screen advertising: 1280×800
Interface	
Alarm Interface	Input/ Output×1
Audio	Built in Speaker 3W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	251.58×198.86×30mm
Weight	Net Weight 1.7Kg, Gross Weight 1.9Kg

FEATURES


- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image advertising
- Two display modes: full screen monitoring video / full screen advertising
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image and/ or audio can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Powered by Linux OS. More stable and cost effective

DIMENSIONS

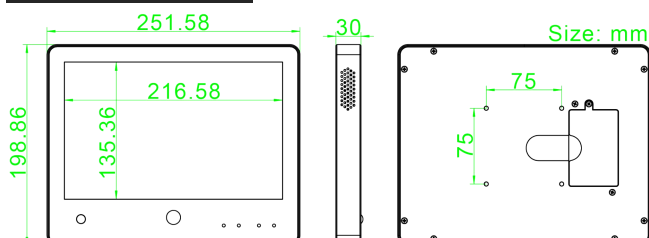

10.1" Portrait Basic PVM

PVM-S101NTH-LPRW



Original Series	S101A
	S101N
	S215A
	S270A
	M270A
S320A	

Basic Series	S101A
	S101N
	S215A
	S270A
	M270B
S320A	


Standard Series	S101A
	S101N
	S215A
	S270A
	M270B
S320A	

Display	
Screen Size	10.1"
Resolution	800×1280 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	170° / 170°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:47±3°,V:80±4°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Display Mode	Full screen video: 800×1280 Full screen advertising: 800×1280
Interface	
Alarm Interface	Input/ Output×1
Audio	Built in Speaker 3W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	166×286×30mm
Weight	Net Weight 1.63Kg, Gross Weight 1.81Kg

FEATURES

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image advertising
- Two display modes: full screen monitoring video / full screen advertising
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image and/ or audio can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Powered by Linux OS. More stable and cost effective

DIMENSIONS



21.5" Landscape Basic PVM

PVM-S215ATH-LPRW



Original Series

S101A

S101N

S215A

S270A

M270A

S320A

Basic Series

S101A

S101N

S215A

S270A

M270B

S320A

Standard Series

S101A

S101N

S215A

S270A

M270B


S320A

Display	
Screen Size	21.5"
Resolution	1920×1080 Pixel
Brightness	300cd/m ²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178°/ 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、 png、 bmp、 gif (resolution:1920*1080)
Display Mode	Full screen video: 1920×1080 Full screen advertising: 1920×1080
Interface	
Alarm Interface	Input/ Output×1
Audio	Built in Speaker×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	519.6×353.2×40mm
Weight	Net Weight 6.02Kg, Gross Weight 6.75Kg

FEATURES

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image advertising
- Two display modes: full screen monitoring video / full screen advertising
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image and/ or audio can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Powered by Linux OS. More stable and cost effective

DIMENSIONS

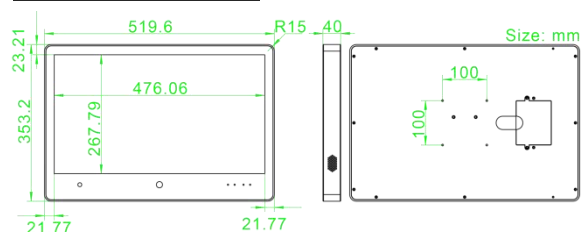

27" Landscape Basic PVM

PVM-S270ATH-LPRW




FEATURES

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image advertising
- Two display modes: full screen monitoring video / full screen advertising
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image and/ or audio can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Powered by Linux OS. More stable and cost effective

Display	
Screen Size	27"
Resolution	1920×1080 Pixel
Brightness	300cd/m ²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178°/ 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Display Mode	Full screen video: 1920×1080 Full screen advertising: 1920×1080
Interface	
Alarm Interface	Input/ Output×1
Audio	Built in Speaker ×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	643×427.15×40mm
Weight	Net Weight 11.3Kg, Gross Weight 12.3Kg

DIMENSIONS

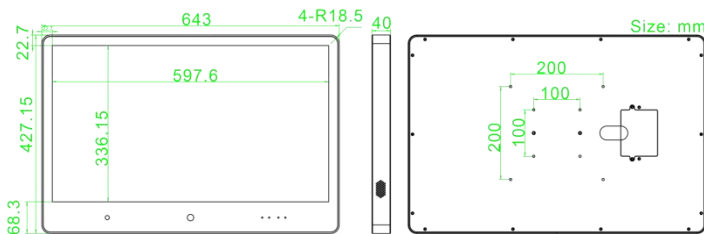

27" Landscape Basic PVM

PVM-M270BTH-LPRW

Motorized Varifocal Lens



Original Series
S101A
S101N
S215A
S270A
M270A
S320A

Basic Series
S101A
S101N
S215A
S270A
M270B
S320A


Standard Series
S101A
S101N
S215A
S270A
M270B
S320A

Display	
Screen Size	27"
Resolution	1920×1080 Pixel
Brightness	300cd/m ²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178° / 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	2.7-13.5mm Motorized Varifocal Lens (H:(55°-103°)±5°,V:(20°-36°)±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Display Mode	Full screen video: 1920×1080 Full screen advertising: 1920×1080
Interface	
Alarm Interface	Input/ Output×1
Audio	Built in Speaker×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	643×427.15×65mm
Weight	Net Weight 10.9Kg, Gross Weight 11.9Kg

FEATURES

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image advertising
- Two display modes: full screen monitoring video / full screen advertising
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Zoom and focus can be done from the WEB, and batch setting can be done from CMS
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image and/ or audio can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Powered by Linux OS. More stable and cost effective

DIMENSIONS

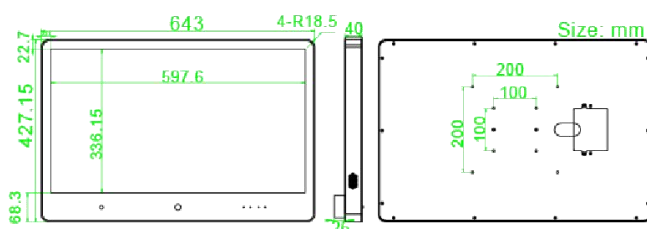

32" Landscape Basic PVM




Display	
Screen Size	32"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178°/ 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	512MB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Display Mode	Full screen video: 1920×1080 Full screen advertising: 1920×1080
Interface	
Alarm Interface	Input/ Output×1
Audio	Built in Speaker ×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset picture to alert.)
General	
Power Supply	DC12V±10%
Dimension	761.6×491×35mm
Weight	Net Weight 13.21Kg, Gross Weight 14.82Kg

FEATURES


- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image advertising
- Two display modes: full screen monitoring video / full screen advertising
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image and/or audio can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Powered by Linux OS. More stable and cost effective

DIMENSIONS

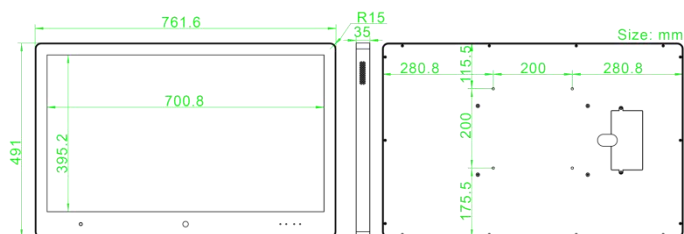

10.1" Landscape Standard PVM

PVM-S101ATF-LPRW



Original Series

S101A
S101N
S215A
S270A
M270A
S320A


S101A
S101N
S215A
S270A
M270A
S320A

Standard Series

S101A
S101N
S215A
S270A
M270A
S320A

Display	
Screen Size	10.1"
Resolution	1280×800 Pixel
Brightness	300cd/m ²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	170° / 170°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	8GB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
PIP Camera	×1, 1080P, ONVIF
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Video Format	mp4、mkv、mov Video Codec: H.264/265(yuv420 only), Video Rate: MAX 5120Kbps
Display Mode	Full screen video: 1280×800 Video + advertising: video 800×800, advertising 480×800 Full screen advertising: 1280×800
Total Ad File Size	1GB (no limitation for the number of pictures and videos)
Interface	
Alarm Interface	Input/ Output×1, FACE Out×1, PIR Out×1, MOTION Out×1
Audio	Built in Speaker 3W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset video or picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	251.58×198.86×30mm
Weight	Net Weight 1.7Kg, Gross Weight 1.9Kg


DIMENSIONS

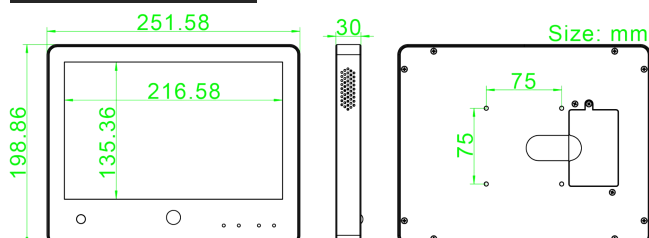

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image and video advertising
- Three display modes: full screen monitoring video / full screen advertising / advertising and monitoring on same screen
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image + audio and/ or video can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Supports display from both the built-in camera & the external camera simultaneously (PIP)
- Powered by Linux OS. More stable and cost effective

10.1" Portrait Standard PVM

PVM-S101NTF-LPRW



Original Series

S101A

S101N

S215A

S270A

M270A

S320A

S101A

S101N

S215A

S270A

M270A

S320A

Standard Series

S101A

S101N

S215A


S270A

M270A

S320A

Display	
Screen Size	10.1"
Resolution	800×1280 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	170°/ 170°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	8GB
DDR/RAM	1GB
Lens	3.3mm (H:47±3°,V:80±4°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Video Format	mp4、mkv、mov Video Codec: H.264/265(yuv420 only), Video Rate: MAX 5120Kbps
Display Mode	Display Mode Full screen video: 800×1280 video + advertising: video 480×800, advertising 800×800 Full screen advertising: 800×1280
Total Ad File Size	1GB (no limitation for the number of pictures and videos)
Interface	
Alarm Interface	Input/ Output×1, FACE Out×1, PIR Out×1, MOTION Out×1
Audio	Built in Speaker 3W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset video or picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	166×286×30mm
Weight	Net Weight 1.63Kg, Gross Weight 1.81Kg

DIMENSIONS



FEATURES

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image and video advertising
- Three display modes: full screen monitoring video / full screen advertising / advertising and monitoring on same screen
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image + audio and/ or video can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Powered by Linux OS. More stable and cost effective

21.5" Landscape Standard PVM

PVM-S215ATF-LPRW




Original Series
S101A
S101N
S215A
S270A
M270A
S320A

S101A
S101N
S215A
S270A
M270A
S320A

Standard Series
S101A
S101N
S215A
S270A
M270A
S320A

Display	
Screen Size	21.5"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178° / 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	8GB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
PIP Camera	×1, 1080P, ONVIF
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Video Format	mp4、mkv、mov Video Codec: H.264/265(yuv420 only), Video Rate: MAX 5120Kbps
Display Mode	Full screen video: 1920×1080 video + advertising: video 1200×1080, advertising 720×1080 Full screen advertising: 1920×1080
Total Ad File Size	1GB (no limitation for the number of pictures and videos)
Interface	
Alarm Interface	Input/ Output×1, FACE Out×1, PIR Out×1, MOTION Out×1
Audio	Built in Speaker×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset video or picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	519.6×353.2×40mm
Weight	Net Weight 6.02Kg, Gross Weight 6.75Kg

DIMENSIONS

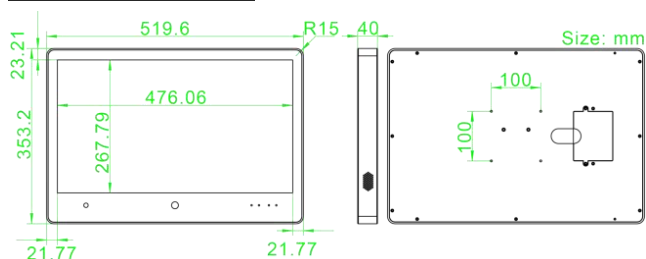


FEATURES

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image and video advertising
- Three display modes: full screen monitoring video / full screen advertising / advertising and monitoring on same screen
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image + audio and/ or video can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Supports display from both the built-in camera & the external camera simultaneously (PIP)
- Powered by Linux OS. More stable and cost effective

27" Landscape Standard PVM

PVM-S270ATF-LPRW

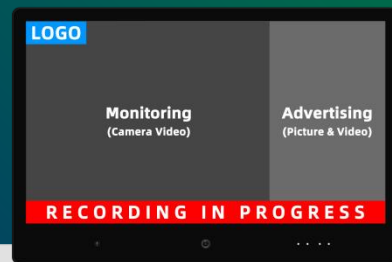

Original Series

S101A
S101N
S215A
S270A
M270A
S320A

Basic Series


S101A
S101N
S215A
S270A
M270A
S320A

Standard Series

S101A
S101N
S215A
S270A
M270A
S320A

Display	
Screen Size	27"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178°/ 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	8GB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
PIP Camera	×1, 1080P, ONVIF
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Video Format	mp4、mkv、mov Video Codec: H.264/265(yuv420 only), Video Rate: MAX 5120Kbps
Display Mode	Full screen video: 1920×1080 video + advertising: video 1200×1080, advertising 720×1080 Full screen advertising: 1920×1080
Total Ad File Size	1GB (no limitation for the number of pictures and videos)
Interface	
Alarm Interface	Input/ Output×1, FACE Out×1, PIR Out×1, MOTION Out×1
Audio	Built in Speaker×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset video or picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	643×427.15×40mm
Weight	Net Weight 11.3Kg, Gross Weight 12.3Kg

DIMENSIONS

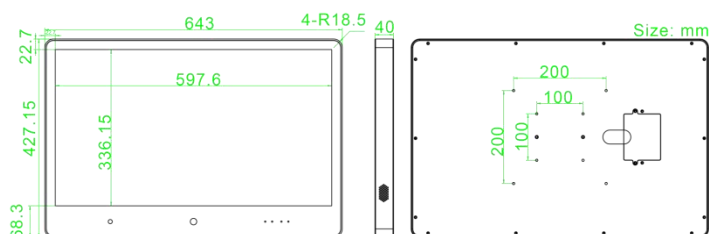

FEATURES

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image and video advertising
- Three display modes: full screen monitoring video / full screen advertising / advertising and monitoring on same screen
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image + audio and/ or video can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Supports display from both the built-in camera & the external camera simultaneously (PIP)
- Powered by Linux OS. More stable and cost effective

27" Landscape Standard PVM

PVM-M270BTF-LPRW


Motorized Varifocal Lens



FEATURES


- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image and video advertising
- Three display modes: full screen monitoring video / full screen advertising / advertising and monitoring on same screen
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Zoom and focus can be done from the WEB, and batch settings can be done from CMS
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image + audio and/ or video can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Supports display from both the built-in camera & the external camera simultaneously (PIP)
- Powered by Linux OS. More stable and cost effective

Display	
Screen Size	27"
Resolution	1920×1080 Pixel
Brightness	300cd/m²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178°/ 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	8GB
DDR/RAM	1GB
Lens	2.7-13.5mm Motorized Varifocal Lens (H:(55°-103°)±5°,V:(20°-36°)±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
PIP Camera	×1, 1080P, ONVIF
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Video Format	mp4、mkv、mov Video Codec: H.264/265(yuv420 only), Video Rate: MAX 5120Kbps
Display Mode	Full screen video: 1920×1080 video + advertising: video 1200×1080, advertising 720×1080 Full screen advertising: 1920×1080
Total Ad File Size	1GB (no limitation for the number of pictures and videos)
Interface	
Alarm Interface	Input/ Output×1, FACE Out×1, PIR Out×1, MOTION Out×1
Audio	Built in Speaker×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset video or picture to alert.)
General	
Power Supply	DC12V±10%, POE
Dimension	643×427.15×65mm
Weight	Net Weight 10.9Kg, Gross Weight 11.9Kg

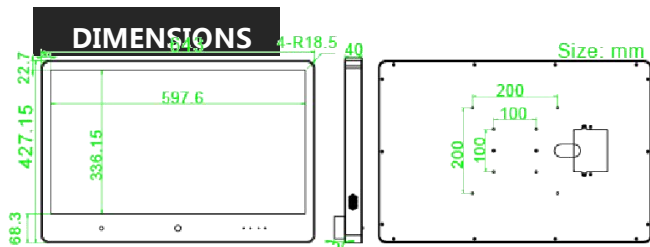

32" Landscape Standard PVM

PVM-S320ATF-LRW

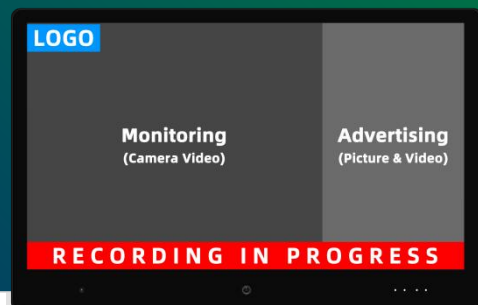

Original Series

S101A

S101N

S215A

S270A

M270B

S320A

Basic Series

S101A

S101N

S215A

S270A

M270B

S320A

Standard Series

S101A

S101N

S215A


S270A

M270B

S320A

Display	
Screen Size	32"
Resolution	1920×1080 Pixel
Brightness	300cd/m ²
Contrast Ratio	1000 : 1
Viewing Angle(H/V)	178°/ 178°
Display Colors	16.7 Million
Response Time	< 30 ms
Camera	
Sensor	1/2.9" , 2MP CMOS
Resolution	1920×1080
EMMC/Flash	8GB
DDR/RAM	1GB
Lens	3.3mm (H:80±4°,V:47±3°)
Video Compression	H.264 / H.265
Motion Detection	Support
Ethernet Port	RJ45×1 10M/100M
Communication	RJ45 / WIFI
Web Application	Support Chrome, Firefox and Edge
Integration Protocol	ONVIF Profile S, API
Image Setting	Contrast, Brightness, Sharpness, Saturation, BLC, WDR, HLC, 3DNR
PIP Camera	×1, 1080P, ONVIF
Record	
Trigger Events	PIR/ Motion Detection/ Video Blind/ AI/ Alarm in
Storage	TF Card / NVR / FTP
Brand Custom and Deterrence Message Overlay	
Pop-up Deterrence Message	png
Voice Prompt	wav
Brand Logo	png
Advertisement	
Picture Format	jpg、png、bmp、gif (resolution:1920*1080)
Video Format	mp4、mkv、mov Video Codec: H.264/265(yuv420 only), Video Rate: MAX 5120Kbps
Display Mode	Full screen video: 1920×1080 video + advertising: video 1200×1080, advertising 720×1080 Full screen advertising: 1920×1080
Total Ad File Size	1GB (no limitation for the number of pictures and videos)
Interface	
Alarm Interface	Input/ Output×1, FACE Out×1, PIR Out×1, MOTION Out×1
Audio	Built in Speaker×2 5W
USB	Micro USB×1
TF Card	TF Card Slot×1 (Max Support:1TB)
PIR Sensor	×1
Ethernet 10 / 100	RJ45×1
Emergency mode trigger interface	×1(Once triggered in emergency circumstances, the device will play a preset video or picture to alert.)
General	
Power Supply	DC12V±10%
Dimension	761.6×491×35mm
Weight	Net Weight 13.21Kg, Gross Weight 14.82Kg

DIMENSIONS

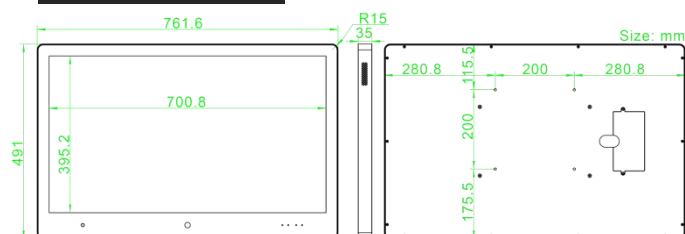

FEATURES

- Built-in 2 Mega Pixel AI Camera
- Real time display of monitoring videos, storage capacity up to 1TB
- Deterrence image: real-time video, deterrence image, audio, and indicator lights
- Support image and video advertising
- Three display modes: full screen monitoring video / full screen advertising / advertising and monitoring on same screen
- Pop-up deterrence image when detected person by AI/motion/PIR or alarm in triggering signal
- Up load LOGO by end user
- Any triggering signal can switch on any or all deterrence image
- Support CMS batch management: device setting and/or upload LOGO, deterrence image, deterrence audio, Ad file
- Emergency display image + audio and/ or video can be switch on by emergency alarm in
- Support privacy mask on the screen
- Face red box can attract audience attention
- Supports display from both the built-in camera & the external camera simultaneously (PIP)
- Powered by Linux OS. More stable and cost effective



www.irlab.net

info@irlab.net